


estel
LUBRICANTS



Protect your Vehicle



Instant Protection from the moment you Start
GERMAN TECHNOLOGY
an ISO Certified Company





German Technology

API
Certified
Lubricants



DEGREE OF VISCOSITY

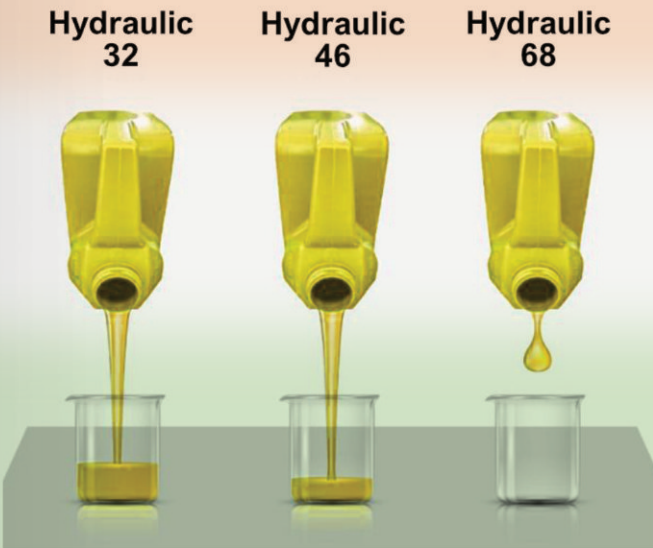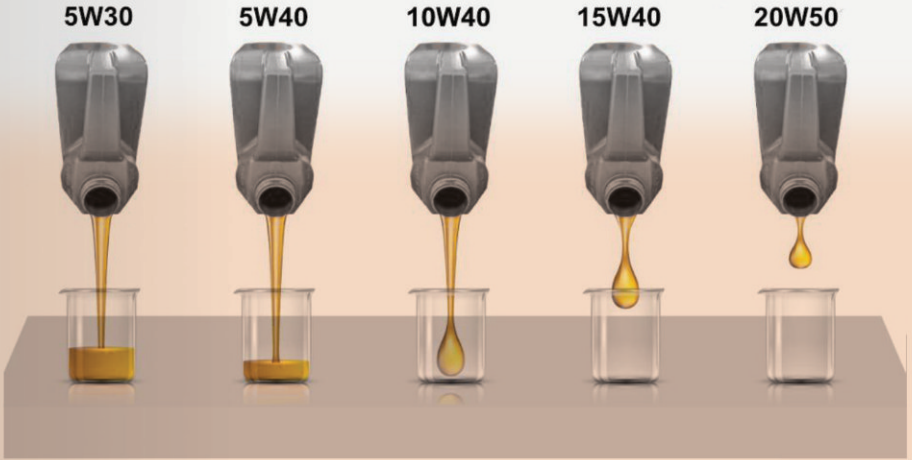

0W40

40= Viscosity at operating temperature

W= Winter

0= Viscosity at engine start up

API Category S
is for "Spark Ignition"
(Petrol Engine)
API Category C
is for "Compression Ignition"
(Diesel Engine)

VESTEL Gear Oil SAE 140 API GL-4/80W-90



DESCRIPTION

VESTEL Gear Oil SAE 140 & 80W-90 API GL-4 is a lubricating gear oil for mechanical transmissions based on high quality base oils and additives that are a balanced combination of active ingredients. Special high pressure agents and other additives offer excellent wear protection even under harsh operating conditions.

FEATURES AND ADVANTAGES

The outstanding performance features of Vestel gear oil offer the following advantages in Chrysler applications:

Excellent adhesion and pressure resistant lubricating film

Good oxidation stability

Exceptional viscosity temperature behavior

Low pour point

Good protection against rust and corrosion

Increase wear-inhibiting effect

Excellent foam-resistant composition

Compatible with all types of metals and sealing materials



4T SAE :10W-50 API:SL/CF FULLY SYNTHETIC



DESCRIPTION

VESTEL Fully-Synthetic high-performance 4-stroke engine oil, specially developed for demanding use in hyper-sport motorcycles with powerful engines. These lubrications provide engines, gearboxes and clutches with optimum protection over the entire range of applications. JASO MA2 approval guarantees the fault-free functioning of wet multi-disc clutches.

SPECIFICATION

JASO MA2/API :SM/API: SL/API: SJ/API: SH/API: SG

Auto Maker Standard: Kawasaki, Harley Davidson, Ducati, Triumph, BMW, Yamaha, Honda, Royal Enfield



SAE:15W-40 API:SL/CF



DESCRIPTION

Motor oils for cars and transporters > Standard engine oils.

SPECIFICATION

SAE 15W-40

API SL/CF

Auto Maker Standard: Toyota, Renault, Maruti, Tata, Mahindra, Hyundai, Honda, Ford, Skoda, Volvo, Volkswagen, Chevrolet, Jeep, Nissan, Datsun, Fiat



4T SAE:20W-50 API:SL/CF

DESCRIPTION

VESTEL High-quality mineral-oil-based engine oil for 4-stroke auto with separate engine and gearbox lubrication. Thanks to the selection of base oils and additives specially adapted for this engine type, this engine oil provides optimum protection against wear and high temperature stability.

FIELD OF APPLICATION

VESTEL 4T SAE 20W-50 has been specially developed for use in large two-cylinder engines. Ideal for air-cooled engines as well as CNG.

SPECIFICATION

API: SJ/API: SH/API: SG/API: CF/ACEA A3/B3-04

Auto Maker Standard: Bajaj Auto, Mahindra & Mahindra, TVS Motors, Piaggio Ape



4T SAE 20W/40 API:SM



DESCRIPTION

Vestel Lubricants 20W40 is a 100% virgin based oil 4 stroke lubricant meets bike manufacture's specification. Vestel lubricants 20W40 provides excellent shear resistance protecting engine and gear box. It meets jaso ma2 specification for optimal wet clutch performance suitable for catalytic converters.

SPECIFICATION

API:SL/SM/SH/SC/ JASO MA /MA2

Auto Maker Standard: Hero, Bajaj, Honda, TVS, KTM, Suzuki, Yamaha, Mahindra

4T SAE 10W/30 API:SM



DESCRIPTION

Vestel 4t Scooter super is synthetic technology motorcycle oil specialty designed to meet today's 4 stroke scooter specification where ac low/ 30 viscosity grade and the JASO MB specification are required JASO MB lubricant ensures-optimal engine performance and fuel economy on all scooters with out wet clutch reduces oil consumption provides low emission.Outstanding detergent and anti-wear properties.

FEATURES

Vestel SAE:10W-30 can be used under the most difficult operating condition (highways congested city traffic etc) for every season vestel sae:10w/50 provides excellent oxidation stability low temperature flow properties enhanced fuel economy and extended drain.

SPECIFICATION

API:SL/SJ/SH/SG/ JASO MB

Auto Maker Standard: Hero, Vespa, Yamaha, TVS, Honda, Suzuki, Aprilia, Mahindra

AUTOMATIC TRANSMISSION FLUID DEXRON IV

DESCRIPTION

Vestel ATF Dexron IV is specially formulated to ensure optimal performance in Chrysler automatic transmissions. Its unique additive package provides the proper frictional properties, excellent low-temperature fluidity and dependable wear protection required in applications where a Chrysler MS-9602 type fluid is recommended.

FEATURES AND BENEFITS

The outstanding performance features of Vestel ATF IV offer the following advantages in Chrysler applications:

Excellent flow properties at low start-up temperatures and high operating temperatures

Improved shift performance and vehicle drive-ability/

improved shudder performance in Chrysler vehicles

Good viscosity stability

Excellent oxidation stability, less fluid breakdown in high-temperature service

Dependable protection against rust and corrosion

Provides more assured wear protection for maximum transmission/trans-axle life

HYDRAULIC OIL VG ISO 32/46/68

DESCRIPTION

Vestel Hydraulic AW series are general lubricating and hydraulic oils with good ageing resistance and additives to improve corrosion protection. Good viscosity temperature behavior good wear protection. Demulsifying good air release, contain zinc.

APPLICATION

For all systems.even if thermally-stressed.

SPECIFICATION

DIN 51524 PART 2, CATEGORY HM ISO 6743/4, CATEGORY HM MAN 698.Denison

Auto Maker Standard: JCB, Caterpillar, Bobcat, Komatsu, Terex



SAE:15W-50 API:SL/CF FULLY SYNTHETIC



DESCRIPTION

VESTEL Standard 15W-50 is a multipurpose multigrade engine oil with a highly purified mineral basis for highly augmented petrol and diesel engines with and without turbocharger.

It has good detergent-dispersing and anti-oxigenic properties. It contains low-ash additives to prolong the endurance of the catalyst and provides safe engine combustion in tough usage conditions.

SPECIFICATION

SAE 15W-50

API SL/CF

Auto Maker Standard: Kawasaki, Harley Davidson, Ducati, Triumph, BMW, Yamaha, Honda, Royal Enfield



SUPER TRACTOR OIL SF-3I

FULLY SYNTHETIC



Agricultural and construction equipment: Lubricants developed specifically for farming and construction equipment.

VESTEL SF 3I is universal oil for transmission and hydraulic systems of farm tractors and construction equipments having oil immersed brakes.

VESTEL SF 3I is specially formulated with additives to provide improved braking with reduced brake noise.

CONSUMER BENEFITS :

- > Excellent anti-wear property.
- > Good antifoam properties.
- > Strengthened oiliness for efficient, quiet and gradual braking.
- > Excellent seal compatibility.
- > It is approved for use in all tractors like Mahindra and Mahindra, NEW- HOLLAND, JOHN DEERE, SAME DEUTZ, TAFE, SONALIKA, SWARAJ, ESCORTS, FORCE, HMT, EICHER having oil immersed brakes. It is also recommended for use in backhoe loaders of TELCON JDt L&T, CASE, JCB, VOLVO, CATERPILLAR, TEREX VECTRA, Mahindra and all other oil immersed brake application.

INTERNATIONAL STANDARDS :

API GL-4, MIL-L-2105, Massey Ferguson M 1143, FORD M2C 1340, John Deere J 20 C/D specifications.



Heavy Vehicle Oil 15W-40 CI-4 Plus

FULLY SYNTHETIC

DESCRIPTION

Motor oils for cars and transporters > Standard engine oils.

APPLICATIONS

VESTEL CI-4 PLUS HD DIESEL ENGINE OIL is recommended for use in a wide range of heavy-duty application and operating environments found in trucking, construction, and agricultural industries.

FEATURES AND BENEFITS

- Reduces oil consumption in older engines prevents soot and sludge formation on piston rings
- Increases engine power output provides excellent protection against thermal breakdown
- Imparts outstanding low temperature cold start protection.

SPECIFICATION

SAE 15W-40

API SM/CF

Auto Maker Standard: Benz, Volvo, Scania, Tata Motors, Ashok Leyland, Swaraj Mazda, Eicher, Hindustan Motors, Mahindra & Mahindra, Ford, Mitsubishi



Premium Motor Oil 5W-30/5W-40

FULLY SYNTHETIC

DESCRIPTION

Motor oils for cars and transporters > Standard engine oils.

APPLICATIONS

VESTEL 5W-30/5W-40 is an advanced fully synthetic engine oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

FEATURES AND BENEFITS

- precise balanced component system recommended viscosity grades for new cars uniquely designed to help provide unsurpassed levels of performance
- cleaning power and engine protection.

SPECIFICATION

SAE 5W-30/5W-40

API SM/CF

Auto Maker Standard: Ford, GM, PSA, BMW, VW, Jaguar, Land Rover, Land Cruiser, Toyota Lexus, Audi, Mercedes-Benz



SAE : 20W/40API : SL/CF

PRODUCT DESCRIPTION

Vestel series is Bus and Truck Petrol and Diesel engine oil developed to meet the requirements of a variety of diesel engines operating under different conditions. It is formulated from highly refined base stocks and chosen additives to provide reliable protection to engines operating under various environments. It is suitable for use in a wide range of on and off-highway applications where such type of lubricant is recommended

OBM 2T OIL



High performance engine oil for 2 stroke outboard 8 motor engine. Meets as per API Standard . Easy starting with longer bearing life & low oil top up. Catalyst converter compatible . outstanding all weather performance excellent thermal & oxidation stability. protection of engine components against rust& corrosion. Change oil as per manufactures "Recommendation".

Brake and clutch Oil Fluid DOT 3/4

HEAVY DUTY BRAKE FLUID DOT4

VESTEL heavy Duty Brake Fluid can be safely used in all hydraulic brake systems except those that require special mineral base fluids.

This D.O.T 3 Heavy Brake Fluid is specially developed to meet motor Vehicle Safety Standard No 116.

Exceed specifications S.A.E.J 70. C.

OIL TREATMENT

VESTEL OIL TREATMENT is a specially blended motor oil supplement designed to give the highest level of performance and engine protection. Special chemical additive are used to give TRIPLE WEAR PROTECTION and COMPLETELY ELIMINATE OIL FORM, factors not usually found in products of this type.

SAE 20W-50 API:SL/CF FULLY SYNTHETIC



- Full virgin, high performance motor oil for air and water-cooled a-stroke engines.
- Maximum performance and protection of the engine.
- Tested on racing machines.
- Guarantees optimum lubrication, outstanding engine cleanliness and maximum wear resistance even under extreme conditions.
- Tested on engines with catalytic converters.
- Suitable for engines with or without a wet clutch.
- Specially developed for Endure and motocross Motorbikes, quads, SXS used off-road.

Product Description



Suitable for Petrol & Diesel vehicles meets SAE:20W-50 & API:SL/CF requirements, easy starting with longer battery life & low oil top up. Catalytic converter compatible. Out-tending all weather performance. Excellent thermal & oxidation stability. Protection of engine components against rust & corrosion. change oil as per manufacturer's recommendation.



SAE 5W-40 API:SN FULLY SYNTHETIC



VESTEL LUBRICANTS 5W-40 is made with a patented blend of ultra high performance synthetic base-stocks fortified with a precisely balanced component system. VESTEL LUBRICANTS 5W-40 has been designed to help protect your engine by providing unsurpassed levels of performance during normal operating conditions and also under severe service such as extreme heat and cold.

SAE 5W-30 API:SM/CF FULLY SYNTHETIC



VESTEL LUBRICANTS 5W-30 is an advanced full synthetic engine oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance. VESTEL LUBRICANTS 5W-30 meets or exceeds the requirements of the industry's toughest standards and outperforms our conventional oils. This technology comes as standard equipment in many different vehicles, including select high-performance vehicles.

SAE 0W-40 API:SM/CF FULLY SYNTHETIC



VESTEL LUBRICANTS 0W-40 Advanced Full Synthetic Motor Oil is engineered for the latest gasoline and diesel engine technology delivering excellent all-round performance. It provides exceptional cleaning power, wear protection and overall performance. VESTEL LUBRICANTS 0W-40 keeps your engine running like new in all driving conditions. 0W-40 is made with a proprietary blend of ultra high performance synthetic base-stocks fortified with a precisely balanced component system

SAE 20W/40 API: CH-4



DESCRIPTION

Vestel Multi-grade 20W-40 (CH-4) is heavy duty engine oil, developed to make turbocharged & naturally aspirated gasoline more powerful and operating under stressful conditions. This oil is formulated with high quality detergent that minimize deposits due to excellent sludge varnish control. Its optimum viscosity characteristics resist drop in oil pressure, which result in great power to engines.

FUNCTIONAL BENEFITS

- Reduces lacquer formation hence better power output at any operating torque.
- Broad viscosity range gives year round engine protection and performance
- Excellent thermal and oxidation stability helps keep engine for smoother operation.
- Good corrosion protection critical engine components.
- The multi-grade version is suitable for all seasons and helps in reducing oil consumption.

PERFORMANCE STANDARD

- Meets Requirements of API CH-4 20W40.



SAE 15W/40 API: CH-4



DESCRIPTION

Vestel Genuine CH-4 Oil 15W-40 is high performance diesel engine oil that provides proven protection of a diesel operating in severe conditions both On and Off-highway applications. Vestel Genuine CH-4 15W40 is primarily intended for use in Diesel Commercial Vehicles. The technology in Vestel Genuine CH-4 Oil 15W-40 delivers excellent performance in both diesel engines as well as older models.

FUNCTIONAL BENEFITS

- Reduces lacquer formation hence better power output at any operating torque.
- Broad viscosity range gives year round engine protection and performance.
- Excellent thermal and oxidation stability helps keep engines clean for smoother operation.
- Good corrosion protects critical engine components.
- The multi grade version is suitable for all seasons and helps in reducing oil consumption.

PERFORMANCE STANDARDS

- Meets the Requirements of API CH-4 15W40.



HSD Marine Oil 15W-40

DESCRIPTION

Engine oils for marine

APPLICATIONS

VESTEL HSD 15W-40 engine oil is designed to provide outstanding performance in the most severe-service marine applications of modern, high-speed diesel engines.

FEATURES AND BENEFITS

- Excellent low-temperature properties that provide exceptional startup wear protection
- Component compatibility that can help extend gasket seal life and service intervals
- BN reserves that help neutralize acid and stay-in-grade shear stability to protect components against wear.
- Advanced detergency and discrepancy abilities, which help promote longer component life

SPECIFICATION

SAE 15W-40

API SL/SM/CF__



2 STROKE MOTOR OIL Outboard Motor



RELIABLE PERFORMANCE

- This 2 stroke motor oils of high quality specially designed for all types outboard motors.
- This 2 stroke motor oils provided with proper viscosity that causes less change in its fluidity due to temperature difference, always keeping the engine in good working condition
- This 2 stroke motor oil provides excellent protection against wear and scuffing of the pistons and piston rings.




GREASE MP3 LITHIUM



Africa Super Olio

We provide advanced protection for your equipment. We can help ensure your equipment runs reliably even in difficult and sometimes hostile environments - and for longer periods of time drop point @ 135 °C

OUR DISTRIBUTORS

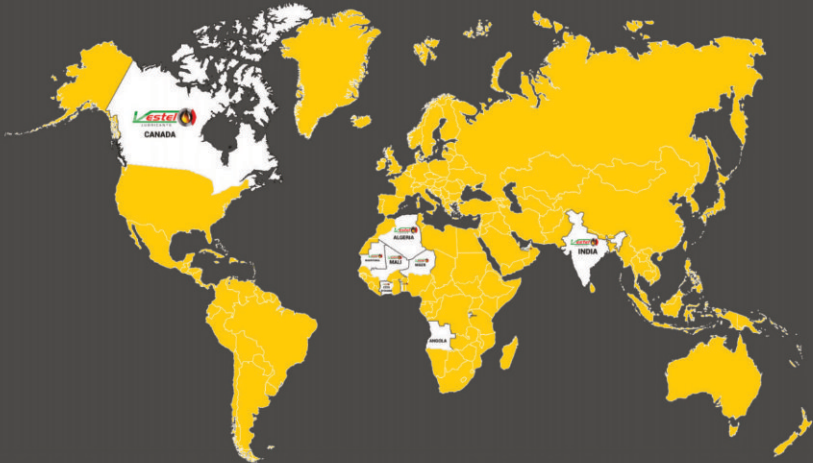

DISCOVER THE SUPER PERFORMANCE OF YOUR VEHICLE
WITH VESTEL LUBRICANTS



Imported by VB COMPANY

111/222/3, Next to Cellular Care, Opp Raffath Agencies, Bhatkal
Karnataka, India, PIN 581320
Contact: +91 9845580111 /+91 9008498111 /+91 8867899998

Vestel Lubricants Manufactured by

Various Lubricants and Grease Factory, New Industrial Area,
Umm AL Quwain, United Arab Emirates
www.vestellubricants.com